


# S P E C I F I C A T I O N S

Please use the illustration and chart provided below to determine the proper performance rating and size dimensions to meet your specific flow requirements.

- Special Dimension and Outlets Available Upon Request.
- 304 Stainless Steel Filter Bodies Available Upon Request.
- Screen Perforation Sizes Available, 1/16", (0.62), .050, .033.  
(1/8" 1000 Series Only)

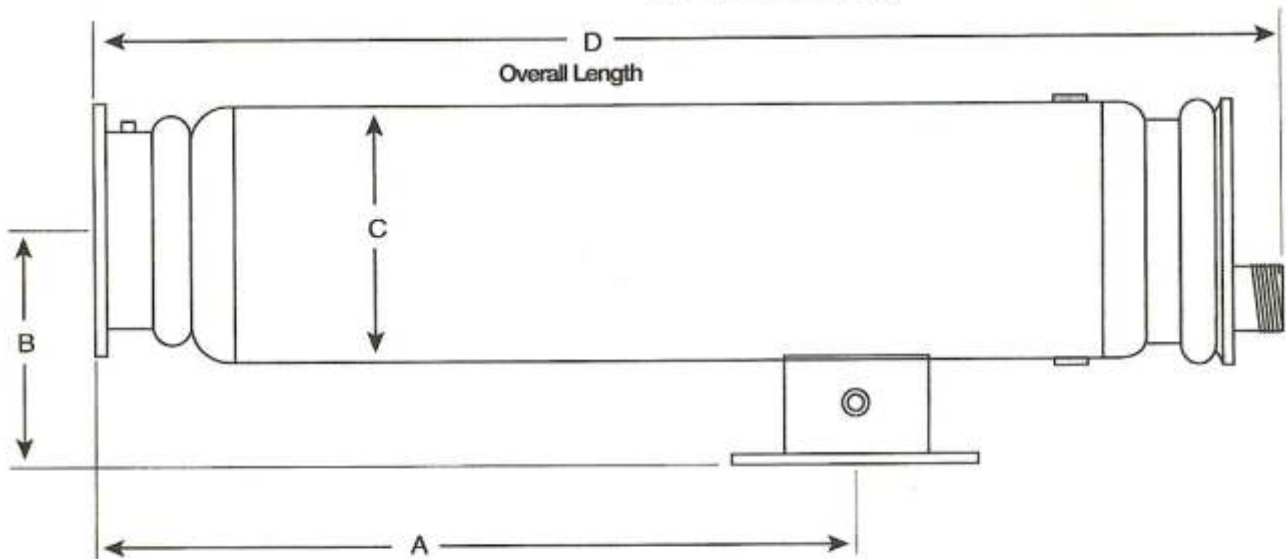

MODEL	FLANGE SIZE	* GALLONS PER MINUTE RATING	SQ. FT. AREA	A	B	C	D	WEIGHT IN LBS.
1000	8"	1200	23 1/2	62	13	14	125-1/2"	298
1000	10"	1200	23 1/2	62	13	14	125-1/2"	298
1005	6"	750	11 3/4	42	13	14	74"	194
1005	8"	750	11 3/4	42	13	14	70-1/2"	194
1010	4"	400	7 1/2	34	9	10	62"	135
1010	6"	400	7 1/2	34	9	10	62"	135

\* All G.P.M. flow ratings are based on 25% plugged screen factor with less than 1 P.S.I. pressure loss in all filter sizes.

### STANDARD PARTS FURNISHED WITH FILTER:

- - 3" Gate Valve (2" on 1010)
- - 1-1/2" Air / Vacuum Release Valve
- 2 - 1/4" N.P.T. Pressure Gauges.
- 2 - 1/4" Valves (gauge shut off).
- All Plugs Needed.